

### Features & Benefits

- Single-Phase Universal AC input
- Rugged Unit for Military Applications
- 92% Efficiency at Full Load
- Wide Input Voltage Range
- Built-in Active PFC Function
- Charger for Lead-Acid Batteries (Flooded, GEL and AGM) and Li-Ion Batteries (Lithium Iron and Lithium Manganese)
- Internal ORing Diode
- Multiple Units in a Redundant or Parallel System
- Droop Current Sharing
- IP67 Sealed
- RS485 Communication
- Temperature Sensor
- Power Good Signal
- Input Under Voltage Protection
- Input/Output Over Voltage Protection
- Input Over Current Protection
- Short Circuit Protection
- Over Temperature Protection
- Reverse Battery Protection
- Two unit can be mounted in 1U height 19" Rack
- On/Off Switch
- LED Indicators
- Forced Air Cooled
- Grounding Interface

### Compliance

Module is designed to meet:

- MIL-STD-461G
- MIL-STD-810G
- MIL-STD-1275E

### Typical Applications

- Military/Defense Power Supplies
- Armored Vehicles
- Land Platforms
- Communications and Radar Systems

Product Ratings	
$V_{IN}$	90–265 $V_{RMS}$ (Single-Phase)
$V_{IN\_NOM}$	220 $V_{RMS}$
$V_{OUT}$	28 $V_{DC}$
$I_{OUT}$	60 A
$P_{OUT}$	1680 W

### Product Description

KMBC05 is an advanced single-phase AC-DC battery charger unit with active PFC function. It operates in constant current (CC) and constant voltage (CV) modes effectively, providing best-in-class regulation and dynamic performance.

The unit is designed to guarantee high performance under extreme environmental conditions with superior protection features against external faults and disturbances while meeting the major military standards. KOLT's innovative engineering has enabled a compact design of the converter with high efficiency.



**Size:** 530 x 215.9 x 44 mm  
**(19"/2 form factor, 1U height)**

**Weight:** 8 ± 0.5 kg

## Electrical Characteristics

Input Characteristics					
Parameters	Notes & Conditions	Min	Typ	Max	Unit
Input Voltage		90	220	265	V <sub>RMS</sub>
Input Voltage (non-working)	Withstanding input voltage	-	-	300	V <sub>RMS</sub>
Input Frequency		47	50	63	Hz
Input Current THD	From half load to full load, nominal input voltage	9	-	15	%
No Load Input Power	Nominal input voltage	-	-	50	W
Inrush Current (peak)	Nominal input voltage	-	-	±40	A
Leakage Current to Ground	10% load, nominal input voltage	-	-	5	mA <sub>RMS</sub>
AC Input Quiescent Current	When input switch is OFF	-	-	200	mA <sub>RMS</sub>

Output Characteristics					
Parameters	Notes & Conditions	Min	Typ	Max	Unit
Output Voltage		-	28	-	V
Output Current		-	-	60	A
Output Power		-	-	1680	W
Output Ripple and Noise (pk-pk)	20 MHz Bandwidth	-	-	800	mV
Line Regulation	Over the full range of line input voltage	-	±0.1	-	V
Load Regulation	From 10% load to full load, nominal input voltage	-	±0.1	-	V
Battery Output Leakage Current	When input switch is OFF	-	-	5	mA


General Characteristics					
Parameters	Notes & Conditions	Min	Typ	Max	Unit
Efficiency	From half load to full load, nominal input voltage	87	-	92	%
Power Factor	From half load to full load, nominal input voltage	0.94	-	0.99	-
Soft-Start Time		-	1	-	s
Hold-up Time		10	15	-	ms
Weight		-	-	8	kg
Cooling	Forced air by temperature-controlled fans				
Built-in Test Feature	DC OK, Remote Error Sensing				

Protections					
Parameters	Notes & Conditions	Min	Typ	Max	Unit
Input Under Voltage Protection	When the voltage returns within the normal limits, unit resumes operation automatically	80	85	90	V <sub>RMS</sub>
Input Over Voltage Protection		265	270	275	V <sub>RMS</sub>
Output Over Current Protection	Fully electronic against over-load	-	80	-	A
Output Over Voltage Protection	-	-	32.4	-	V
Input Over Current Protection	Auto-retry				
Output Short Circuit Protection	Fully electronic against over-load and continuous short-circuit conditions				
Over Temperature Protection	Automatically resumes operation when temperature decreases				
Battery	Prevention of battery discharge when charger is off				
	Reverse polarity protection				

Isolation Characteristics					
Parameters	Notes & Conditions	Min	Typ	Max	Unit
Insulation Resistance	Input to Case	-	>100	-	MΩ
	Output to Case	-	>100	-	MΩ
Isolation Voltage	Input to Output	-	-	500	V <sub>DC</sub>
	Input to Case	-	-	500	V <sub>DC</sub>
	Output to Case	-	-	500	V <sub>DC</sub>


Environmental Characteristics						
Parameters	Standard	Min	Typ	Max	Unit	Status
Operational Temperature	MIL-STD-810G Method 501.5/502.5 Procedure II	-32	-	+50	°C	Passed
Storage / Transport Temperature	MIL-STD-810G Method 501.5/502.5 Procedure I	-40	-	+63	°C	Passed
Operational Low Pressure	MIL-STD-810G Method 500.5 Procedure II	-	-	10000	ft	Similarity*
Storage / Transport Low Pressure	MIL-STD-810G Method 500.5 Procedure I	-	-	15000	ft	Designed to Meet
Parameters	Standard	Waveform	Peak Value	Pulse Duration	Axis	Status
Shock	MIL-STD-810G Method 516.6 Procedure I	Sawtooth	20g	11 ms	±X, ±Y, ±Z	Similarity*
		Half-Sine	10g	11 ms	±X, ±Y, ±Z	Similarity*
Parameters	Standard	Category		Platform	Vehicle	Status
Vibration	MIL-STD-810G Method 514.6 Procedure I	Category 4		Secured Cargo	Truck Transportation and Composite Wheeled Vehicles	Similarity*
		Category 8		Aircraft	Propeller	Similarity*
		Category 11		Railroad	Train	Similarity*
		Category 20		Ground	Wheeled Vehicles	Similarity*
		Category 21		Watercraft	Marine Vehicles	Similarity*
Parameters	Standard	Condition				Status
Salt Fog	MIL-STD-810G Method 509.5	24 hours spray, 24 hours dry, applied 2 times				Designed to Meet
Sand and Dust	MIL-STD-810G Method 510.5 Procedure I/II	<150 µm Dust 150-850 µm Sand				Similarity*
Fungus	MIL-STD-810G Method 508.6	Analysis of the degree of inertness to fungus growth of the components.				Designed to Meet
Solar Radiation	MIL-STD-810G Method 505.5 Procedure I	A2				Designed to Meet
Humidity	MIL-STD-810G Method 507.5 Procedure II	≥ %95 Relative @30°C				Similarity*
Noise	MIL-STD-1474E	≤ 75 dB at a distance of 1 meter				Passed
Impermeability	IP67	Tested by immersion in 1 m water for 30 minutes				Passed
Parameters	Standard	Test				Status
EMI/EMC	MIL-STD-461G Ground Army	CE102	CS101 CS114 CS115 CS116 CS118	RE102	RS103	Similarity*

\* Verified on similar unit with a height of 2U. Both units consist of identical converter modules

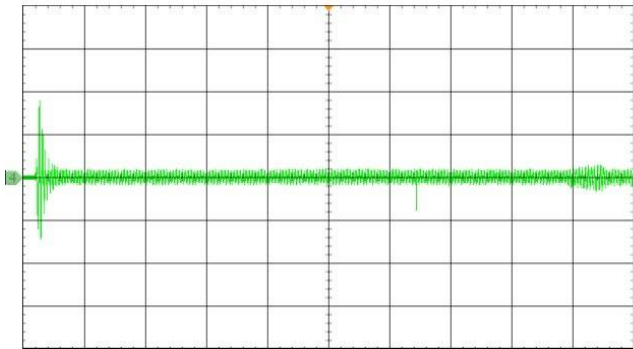


Input current (green) (10 A/div) Time base: 400 ms/div

**Figure 1.** Inrush current at nominal input voltage

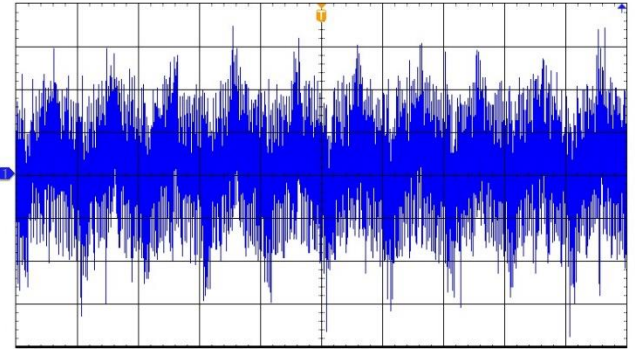


Leakage current (navy blue) (10 mA/div) Time base: 20 ms/div

**Figure 4.** Leakage current at nominal input voltage and 10% load current

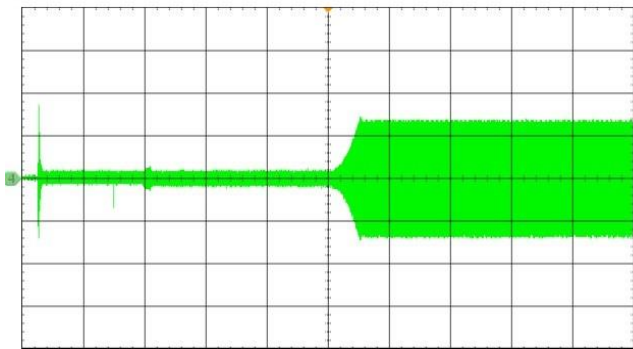


Input current (green) (10 A/div) Time base: 2 s/div

**Figure 2.** Input current for inrush and start-up stages at nominal input voltage

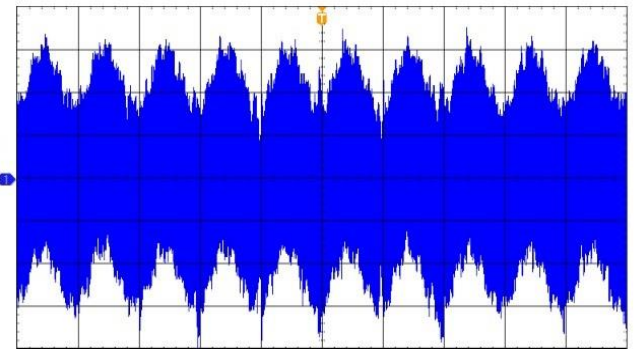


Output voltage (navy blue) (100 mV/div) Time base: 10 ms/div

**Figure 5.** Output voltage ripple at nominal input voltage and rated load current (AC Coupled), Bandwidth: 20 MHz

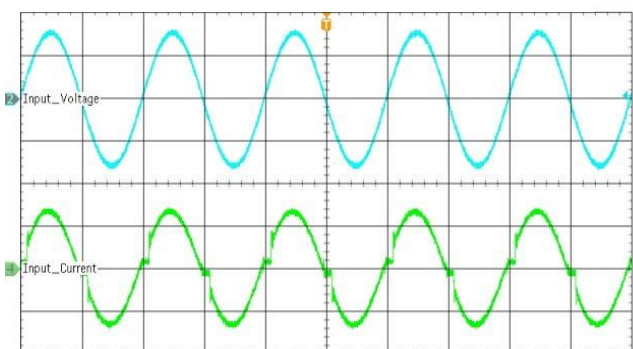

Input voltage (blue) (200 V/div) Time base: 10 ms/div  
Input current (green) (10 A/div)


**Figure 3.** Typical input voltage and current waveforms at rated load current

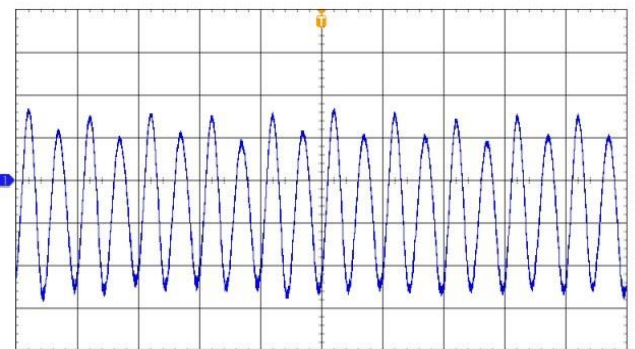

Output voltage (navy blue) (50 mV/div) Time base: 10 μs/div


**Figure 6.** Zoomed in view of output voltage ripple at nominal input voltage and rated load current (AC Coupled), Bandwidth: 20 MHz



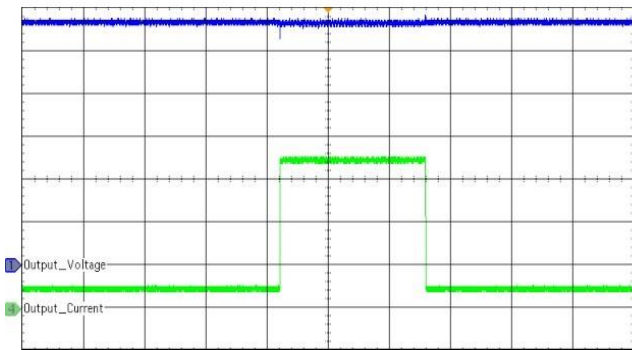


Output voltage (navy blue) (5 V/div) Time base: 200 ms/div  
Output current (green) (25 A/div)

**Figure 7.** Load transient response: from 10% to 100% and back to 10% at nominal output voltage (DC Coupled)

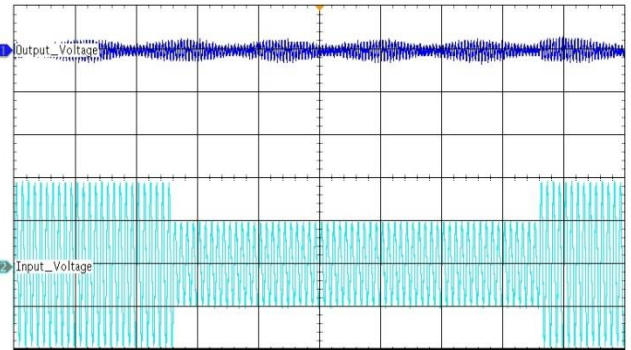


Output voltage (navy blue) (1 V/div) Time base: 200 ms/div  
Input voltage (blue) (200 V/div)

**Figure 10.** Zoomed in view of line transient response: from 265  $V_{RMS}$  to 135  $V_{RMS}$  and back to 265  $V_{RMS}$  at nominal output voltage (AC Coupled)

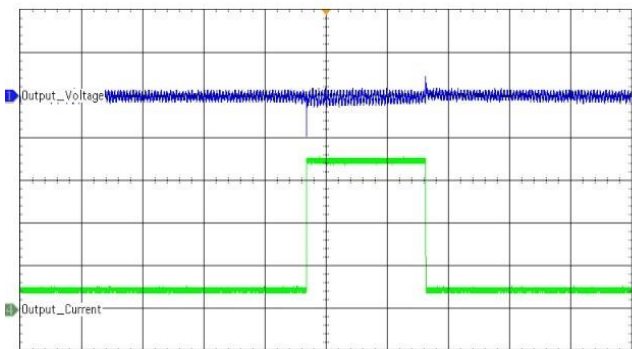


Output voltage (navy blue) (1 V/div) Time base: 100 ms/div  
Output current (green) (20 A/div)

**Figure 8.** Zoomed in view of load transient response: from 10% to 100% and back to 10% at nominal output voltage (AC Coupled)

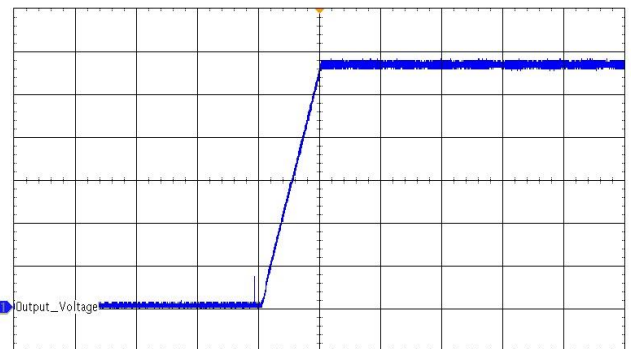


Output voltage (navy blue) (5 V/div) Time base: 1 s/div

**Figure 11.** Start-up waveform at rated load current and nominal output voltage

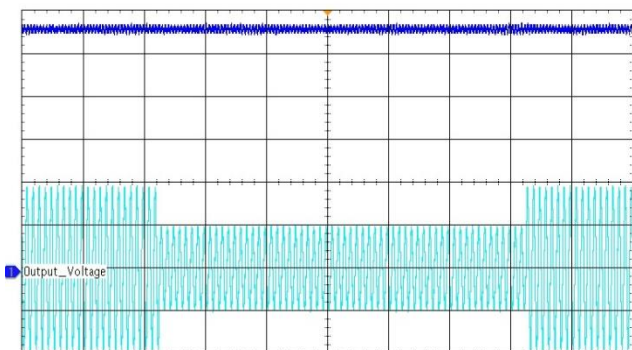


Output voltage (navy blue) (5 V/div) Time base: 200 ms/div  
Input voltage (blue) (200 V/div)

**Figure 9.** Line transient response: from 265  $V_{RMS}$  to 135  $V_{RMS}$  and back to 265  $V_{RMS}$  at nominal output voltage (DC Coupled)

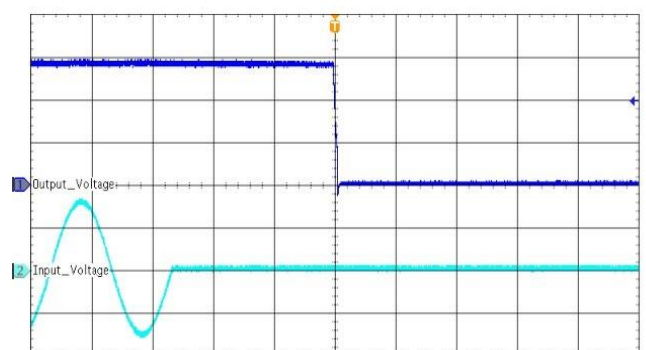


Output voltage (navy blue) (10 V/div) Time base: 10 ms/div  
Input voltage (blue) (200 V/div)


**Figure 12.** Hold-up waveform at rated load current and nominal output voltage

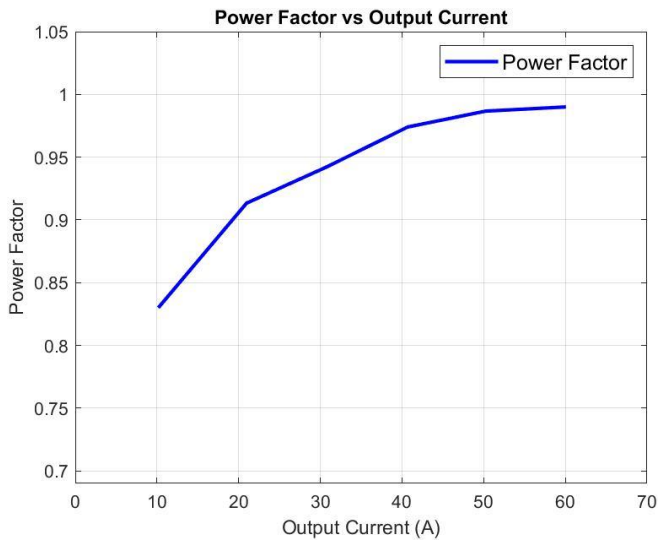


**Figure 13.** Power factor versus output current at nominal input voltage

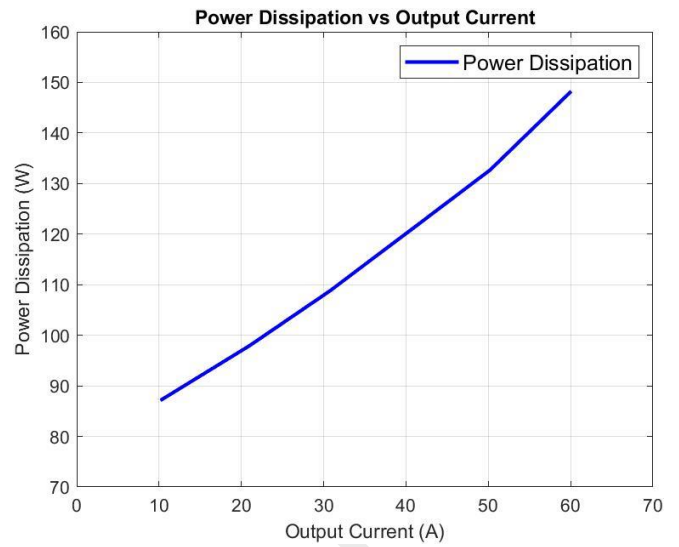

**Figure 15.** Power dissipation versus output current at nominal input voltage

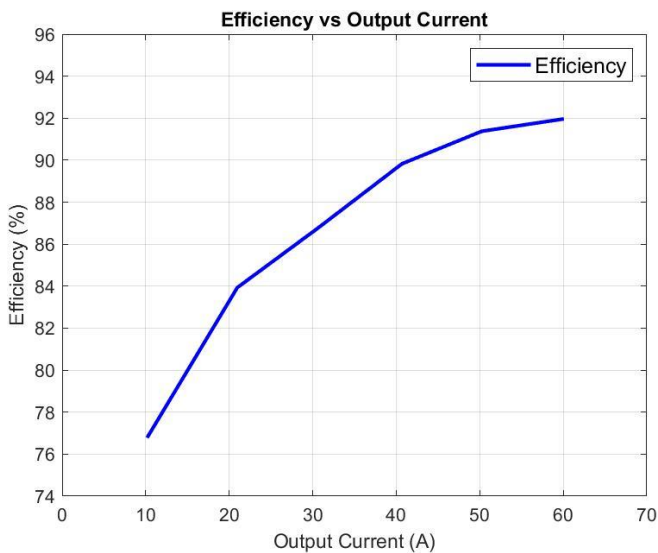

**Figure 14.** Efficiency versus output current at nominal input voltage

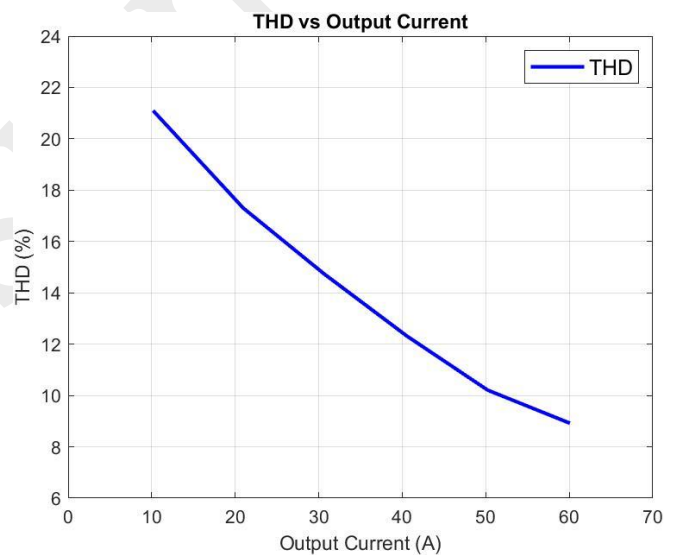

**Figure 16.** Total harmonic distortion (THD) versus output current at nominal input voltage

## Connector Configuration



Figure 17. Connector Panel

## AC Input Connector (KN1)

### Part Numbers (interchangeable):

- Amphenol 97B-4102E-16S-1P
- ITT Cannon CA3102E16S-1P-B-F80




Figure 18. Input Connector View

Pin	Signal Name	Function
A	PHASE	AC Line Input (PHASE)
B	PHASE	AC Line Input (PHASE)
C	PHASE	AC Line Input (PHASE)
D	NEUTRAL	AC Line Input (NEUTRAL)
E	NEUTRAL	AC Line Input (NEUTRAL)
F	NEUTRAL	AC Line Input (NEUTRAL)
G	CHASSIS	AC Line Input (EARTH)



## DC Output Connector (KN2)

### Part Numbers:

- Amphenol 97B-3102E-22-22S




Figure 19. Output Connector View

Pin	Signal Name	Function
A	OUT	DC Output
B	OUT	DC Output
C	OUT_RTN	DC Output Return
D	OUT_RTN	DC Output Return

## Signal Connector (KN3)

### Part Numbers:

- D38999/20WC35SN




Figure 20. Signal Connector View

Pin	Signal Name	Function
1	DATA+	Factory service input
2	DATA-	Factory service input
3	DATA_RTN	Factory service return signal
4	-	-
5	ID0	Identification input
6	ID1	Identification input
7	ID2	Identification input
8	ID3	Identification input
9	ID_RTN	Identification return signal
10	-	-
11	CS_DATA+	Current share input
12	CS_DATA-	Current share input
13	CS_DATA_RTN	Current share return signal
14	-	-
15	-	-
16	NTC	Temperature sensor
17	NTC_RTN	Temperature sensor return signal
18	-	-
19	PGOOD	Power good signal
20	PGOOD_RTN	Power good return signal
21	-	-
22	-	-

## Led Configuration

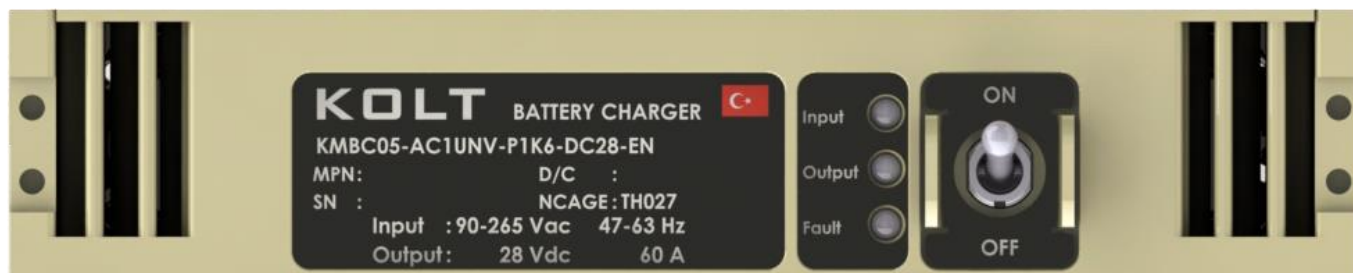


Figure 21. Front Panel

LED Name	Status	Description	Function
Input	Off	AC Input Passive	AC input is below 70 V <sub>RMS</sub>
	Green	AC Input Active	AC input voltage is within the operating limit (90-265 V <sub>RMS</sub> )
	Red	AC Input Fault	<ul style="list-style-type: none"> <li>• Input Under Voltage / Over Voltage</li> <li>• Input Over Current</li> <li>• Line Frequency not within limits</li> </ul>

LED Name	Status	Description	Function
Output	Off	DC Output Passive	DC output is not active
	Green	DC Output Active	DC output is within the defined limits
	Red	DC Output Fault	<ul style="list-style-type: none"> <li>• Output Over Voltage / Short Circuit</li> <li>• Output Reverse Voltage</li> <li>• Output Regulation Error</li> </ul>

LED Name	Status	Description	Function
Fault	Off	Device OK	No fault is present
	Red	Device Fault	<ul style="list-style-type: none"> <li>• Mid-Bus Over Voltage</li> <li>• Temperature</li> <li>• Critical Fault</li> </ul>

## Color Configuration

Color Option	Standard	Color Code	Color Name
C01	RAL	6014	Yellow Olive
C02	RAL	9005	Jet Black
C03	FED-STD-595C	34094	Green 383 Camouflage
C04	FED-STD-595C	37030	Black Camouflage
C05	RAL	9016	Traffic White
C06	RAL	7001	Silver Grey
C07	FED-STD-595C	30315	Desert Sand Camouflage
C08	FED-STD-595C	33245	Earth Yellow Camouflage

## Label Configuration

Label Option	Description
L01	Label for Turkish language
L02	Label for English language



Figure 22. L01 Label Option Front View



Figure 23. L01 Label Option Back View



Figure 24. L02 Label Option Front View



Figure 25. L02 Label Option Back View

## Mechanical Drawings

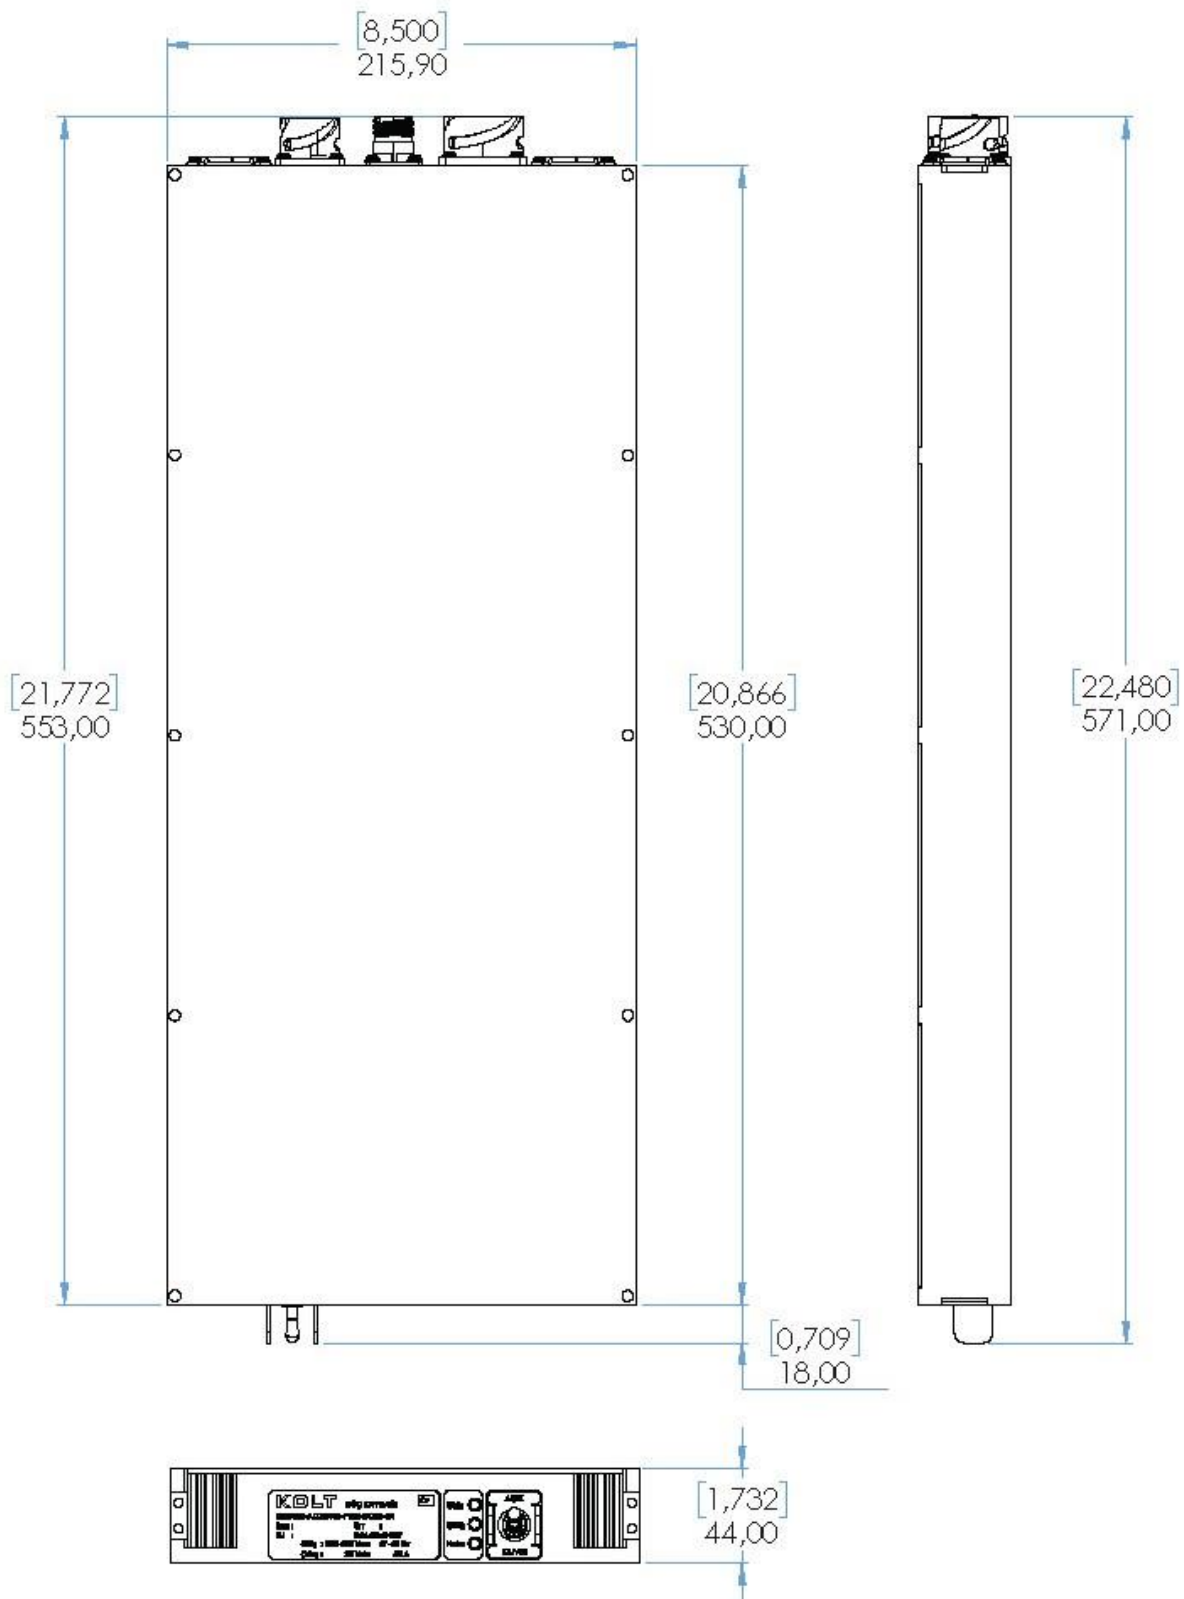


Figure 26. Mechanical Dimensions

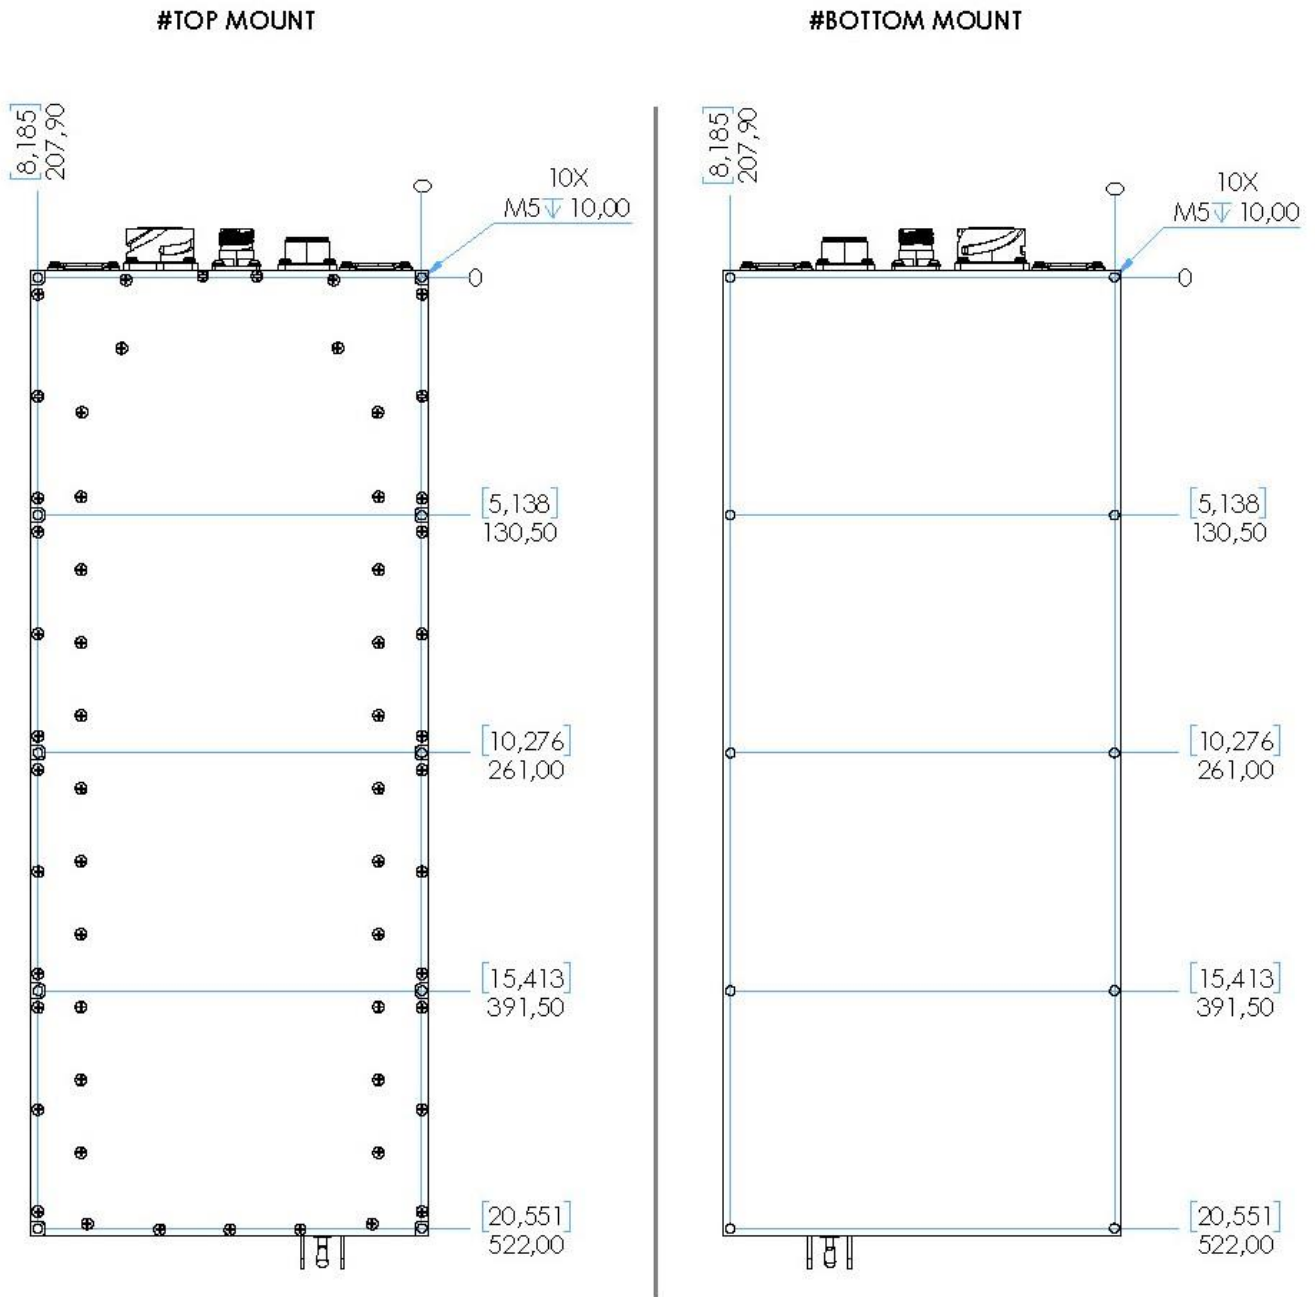


Figure 27. Mounting Details and Mounting Holes Coordinates

**Material:** Aluminum Alloy 6061-T6

Dimensions are in millimeters [inches].



## Part Ordering Information

Family	Input Voltage	Output Power	Output Voltage	Package	Color	Label	Option Field
KMBC05	AC1UNV Single-Phase Universal AC	P1K6 1.6 kW	DC28 28 VDC	EN Enclosed	Cxx (C01-C99)	Lxx (L01-L99)	-

Ordering Number	Color Option	Label Option
KMBC05-AC1UNV-P3K3-DC28-EN-C01-L01	RAL 6014 Yellow Olive	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C02-L01	RAL 9005 Jet Black	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C03-L01	FED-STD-595C 34094 Green 383 Camouflage	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C04-L01	FED-STD-595C 37030 Black Camouflage	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C05-L01	RAL 9016 Traffic White	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C06-L01	RAL 7001 Silver Grey	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C07-L01	FED-STD-595C 30315 Desert Sand Camouflage	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C08-L01	FED-STD-595C 33245 Earth Yellow Camouflage	Turkish
KMBC05-AC1UNV-P3K3-DC28-EN-C01-L02	RAL 6014 Yellow Olive	English
KMBC05-AC1UNV-P3K3-DC28-EN-C02-L02	RAL 9005 Jet Black	English
KMBC05-AC1UNV-P3K3-DC28-EN-C03-L02	FED-STD-595C 34094 Green 383 Camouflage	English
KMBC05-AC1UNV-P3K3-DC28-EN-C04-L02	FED-STD-595C 37030 Black Camouflage	English
KMBC05-AC1UNV-P3K3-DC28-EN-C05-L02	RAL 9016 Traffic White	English
KMBC05-AC1UNV-P3K3-DC28-EN-C06-L02	RAL 7001 Silver Grey	English
KMBC05-AC1UNV-P3K3-DC28-EN-C07-L02	FED-STD-595C 30315 Desert Sand Camouflage	English
KMBC05-AC1UNV-P3K3-DC28-EN-C08-L02	FED-STD-595C 33245 Earth Yellow Camouflage	English

## Revision History

Document Number	Revision	Date	Description	Page Number(s)
109411	01	21.10.2024	Initial Release	-

## Contact



[www.koltpower.com](http://www.koltpower.com)

### KOLT Türkiye

salesturkiye@koltpower.com

KOLT Mühendislik A.Ş.

Serhat Mah. 1148. Sok. No:1B/1  
06374 Yenimahalle, Ankara  
Türkiye

### KOLT Europe

saleseurope@koltpower.com

KOLT Power Ltd.

Fareham Innovation Centre Merlin  
House. 4 Meteor way. Daedalus Drive.  
Fareham. Lee-On-Solent PO13 9FU.  
United Kingdom

### KOLT North America

salesna@koltpower.com

KOEN, Inc.

2445 Augustine Dr. Suite 150  
Santa Clara, CA 95054  
United States

## Connect with us



kolt-inc



kolt.inc



KOLTEngineering



kolthq

The information provided in this datasheet is believed to be accurate and reliable. However, KOLT assumes no responsibility for any consequences arising from its use, nor for any infringement of patents or other rights of third parties that may result from its use. These products are sold only under KOLT's general terms and conditions of sale, unless otherwise specified in writing. Specifications are subject to change without notice. All rights reserved.